



Miscellaneous Paper CHL-97-6
June 1997

by George F. Turk, Jeffrey A. Melby

19970822 023

3721-3729	3729-3737	3737-3745	3745-3753	3753-3761	3761-3769	3769-3777	3777-3785	3785-3793	3793-3801	3801-3809	3809-3817	3817-3825	3825-3833	3833-3841	3841-3849	3849-3857	3857-3865	3865-3873	3873-3881	3881-3889	3889-3897	3897-3905	3905-3913	3913-3921	3921-3929	3929-3937	3937-3945	3945-3953	3953-3961	3961-3969	3969-3977	3977-3985	3985-3993	3993-4001	4001-4009	4009-4017	4017-4025	4025-4033	4033-4041	4041-4049	4049-4057	4057-4065	4065-4073	4073-4081	4081-4089	4089-4097	4097-4105	4105-4113	4113-4121	4121-4129	4129-4137	4137-4145	4145-4153	4153-4161	4161-4169	4169-4177	4177-4185	4185-4193	4193-4201	4201-4209	4209-4217	4217-4225	4225-4233	4233-4241	4241-4249	4249-4257	4257-4265	4265-4273	4273-4281	4281-4289	4289-4297	4297-4305	4305-4313	4313-4321	4321-4329	4329-4337	4337-4345	4345-4353	4353-4361	4361-4369	4369-4377	4377-4385	4385-4393	4393-4401	4401-4409	4409-4417	4417-4425	4425-4433	4433-4441	4441-4449	4449-4457	4457-4465	4465-4473	4473-4481	4481-4489	4489-4497	4497-4505	4505-4513	4513-4521	4521-4529	4529-4537	4537-4545	4545-4553	4553-4561	4561-4569	4569-4577	4577-4585	4585-4593	4593-4601	4601-4609	4609-4617	4617-4625	4625-4633	4633-4641	4641-4649	4649-4657	4657-4665	4665-4673	4673-4681	4681-4689	4689-4697	4697-4705	4705-4713	4713-4721	4721-4729	4729-4737	4737-4745	4745-4753	4753-4761	4761-4769	4769-4777	4777-4785	4785-4793	4793-4801	4801-4809	4809-4817	4817-4825	4825-4833	4833-4841	4841-4849	4849-4857	4857-4865	4865-4873	4873-4881	4881-4889	4889-4897	4897-4905	4905-4913	4913-4921	4921-4929	4929-4937	4937-4945	4945-4953	4953-4961	4961-4969	4969-4977	4977-4985	4985-4993	4993-5001	5001-5009	5009-5017	5017-5025	5025-5033	5033-5041	5041-5049	5049-5057	5057-5065	5065-5073	5073-5081	5081-5089	5089-5097	5097-5105	5105-5113	5113-5121	5121-5129	5129-5137	5137-5145	5145-5153	5153-5161	5161-5169	5169-5177	5177-5185	5185-5193	5193-5201	5201-5209	5209-5217	5217-5225	5225-5233	5233-5241	5241-5249	5249-5257	5257-5265	5265-5273	5273-5281	5281-5289	5289-5297	5297-5305	5305-5313	5313-5321	5321-5329	5329-5337	5337-5345	5345-5353	5353-5361	5361-5369	5369-5377	5377-5385	5385-5393	5393-5401	5401-5409	5409-5417	5417-5425	5425-5433	5433-5441	5441-5449	5449-5457	5457-5465	5465-5473	5473-5481	5481-5489	5489-5497	5497-5505	5505-5513	5513-5521	5521-5529	5529-5537	5537-5545	5545-5553	5553-5561	5561-5569	5569-5577	5577-5585	5585-5593	5593-5601	5601-5609	5609-5617	5617-5625	5625-5633	5633-5641	5641-5649	5649-5657	5657-5665	5665-5673	5673-5681	5681-5689	5689-5697	5697-5705	5705-5713	5713-5721	5721-5729	5729-5737	5737-5745	5745-5753	5753-5761	5761-5769	5769-5777	5777-5785	5785-5793	5793-5801	5801-5809	5809-5817	5817-5825	5825-5833	5833-5841	5841-5849	5849-5857	5857-5865	5865-5873	5873-5881	5881-5889	5889-5897	5897-
-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-----------	-------

DTIC QUALITY INSPECTED 3

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products.

The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

This document will be modified periodically as new guidelines are incorporated. Please contact the authors or Internet site www.wes.army.mil, then on to Coastal and Hydraulics Laboratory page and then on to publications for news on updates.



PRINTED ON RECYCLED PAPER

CORE-LOC™ Concrete Armor Units: Technical Guidelines

by George F. Turk, Jeffrey A. Melby

U.S. Army Corps of Engineers
Waterways Experiment Station
3909 Halls Ferry Road
Vicksburg, MS 39180-6199

Final report

Approved for public release; distribution is unlimited


DTIC QUALITY INSPECTED 3

Prepared for U.S. Army Corps of Engineers
Washington, DC 20314-1000

Under Civil Works Research Work Units 32536 and 32662



**US Army Corps
of Engineers**
Waterways Experiment
Station

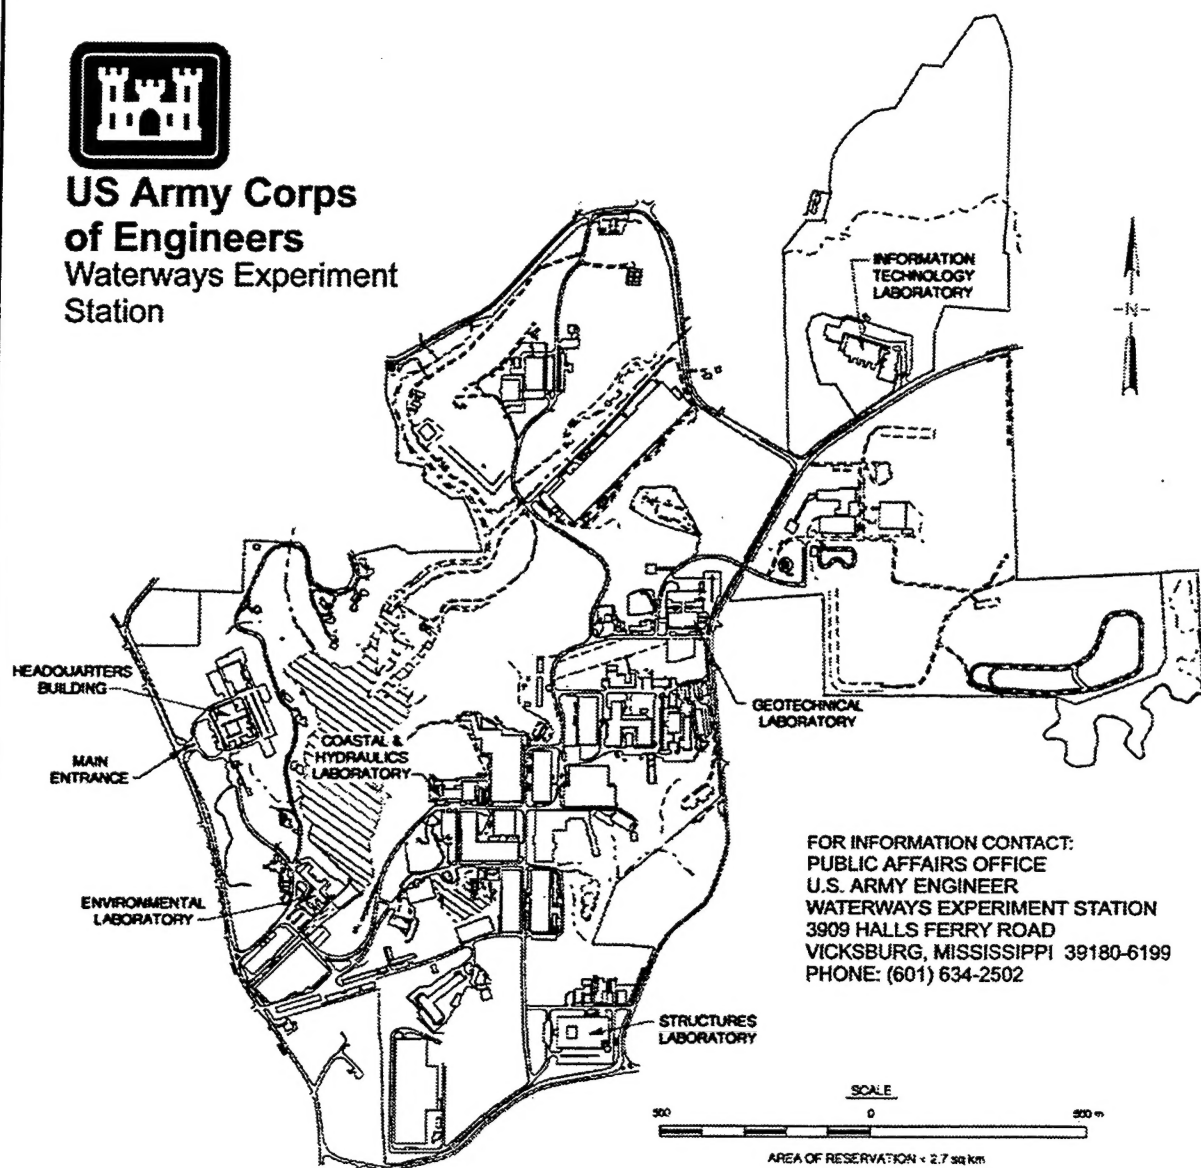

FOR INFORMATION CONTACT:
PUBLIC AFFAIRS OFFICE
U.S. ARMY ENGINEER
WATERWAYS EXPERIMENT STATION
3909 HALLS FERRY ROAD
VICKSBURG, MISSISSIPPI 39180-6199
PHONE: (601) 634-2502

Waterways Experiment Station Cataloging-in-Publication Data

Turk, George F.

CORE-LOC™ concrete armor units : technical guidelines / by George F. Turk, Jeffrey A. Melby ; prepared for U.S. Army Corps of Engineers.

28 p. : ill. ; 28 cm. -- (Miscellaneous paper ; CHL-97-6)

Includes bibliographic references.

1. Shore protection. 2. Breakwaters. I. Melby, Jeffrey A. II. United States. Army. Corps of Engineers. III. U.S. Army Engineer Waterways Experiment Station. IV. Coastal and Hydraulics Laboratory (U.S. Army Engineer Waterways Experiment Station) V. Title. VI. Series: Miscellaneous paper (U.S. Army Engineer Waterways Experiment Station) ; CHL-97-6.

TA7 W34m no.CHL-97-6

Contents

Preface	v
1—Core-loc Unit and Armor Layer Characteristics	1
Core-loc Geometry	1
Stable Weight Estimation	4
Armor Layer Thickness	4
Armor Layer Packing Density	5
2—Core-loc as a Repair Unit for Dolos Armoring	7
3—Structural Considerations	8
4—Fabrication, Handling and Placement	9
Concrete Quality	9
American Standards for Concrete, Cement, and Aggregates	10
Casting Guidelines	12
Handling and Stocking	13
Core-loc Placement	14
5—Recommended Standard Core-loc Sizes	17
References	23
SF 298	

List of Figures

Figure 1. Four views of core-loc	2
Figure 2. Nondimensional schematic of typical core-loc	2
Figure 3. Nondimensional schematic of core-loc surface area	3
Figure 4. Efficient storage pattern for core-loc in casting yard	13
Figure 5. Core-loc stacked two courses in height	14
Figure 6. One possible method for placement of toe units: cannon fashion ..	14
Figure 7. Possible method for toe and second course placement	15
Figure 8. Schematic of core-loc placement grid	16

List of Tables

Table 1. Possible Core-Loc Prototype Packing Density Coefficients Based on Prototype Accropode Experience	6
Table 2. Specifications for Placement Grid Coordinates	16
Table 3. Geometric Relationships of Standard Core-loc Sizes	18
Table 4. Surface Area Relationships of Standard Core-loc sizes	18
Table 5. Hydraulically Stable Weight for Core-loc on 1V:1.33H Slope	19
Table 6. Hydraulically Stable Weight for Core-loc on 1V:1.5H Slope	20
Table 7. Hydraulically Stable Weight for Core-loc on 1V:1.2H Slope	21
Table 8. Volume and Area Requirements of Standard Core-loc Sizes	22

Preface

Funding for CORE-LOC development, as discussed in this report, was provided by the Coastal Navigation and Storm Damage Reduction Research Program (Coastal Program), and the Repair, Evaluation, Maintenance, and Rehabilitation (REMR) Research Program, which are both part of the Civil Works Research and Development Program, Headquarters, U.S. Army Corps of Engineers (HQUSACE).

Mr. Harold Tohlen, HQUSACE, was the REMR Coordinator and the Coastal Program Coordinator was Mr. David Mathis, both of the Directorate of Research and Development, HQUSACE. Members of the REMR Overview Committee were Mr. Harold Tohlen and Dr. Tony C. Liu, both of HQUSACE. Messrs. John H. Lockhart, Jr., Barry Holliday, and Charles Chesnutt served as HQUSACE Coastal Program Monitors. Ms. Carolyn Holmes, Coastal and Hydraulics Laboratory (CHL), U.S. Army Engineer Waterways Experiment Station (WES), was the Coastal Program Manager and Mr. William F. McCleese, WES Structures Laboratory, was the REMR Program Manager. Mr. D.D. Davidson, CHL, was the REMR Coastal Problem Area Leader.

The studies were completed under the general supervision of Dr. James R. Houston and Mr. Charles C. Calhoun, Jr., Director and Assistant Director, CHL, respectively, and under the direct supervision of Mr. C. Gene Chatham, Chief, Wave Dynamics Division, and Mr. D.D. Davidson, Chief, Wave Research Branch, CHL.

At the time of preparation of this report, Dr. Robert W. Whalin was Director of WES and COL Bruce K. Howard, EN, was Commander.

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products.

1 Core-loc Unit and Armor Layer Characteristics

The U.S. Army Engineer Waterways Experiment Station (WES), Coastal and Hydraulics Laboratory is involved in an ongoing research effort to further the understanding of concrete armoring for navigation and shore protection structures. This research stems from the need to design and build reliable structures in high-wave-energy environments. Because of the very difficult construction, in-service, and repair conditions associated with these environments, the basic developmental program has focused on randomly placed armor units. From this research, a new type of concrete armor unit called CORE-LOC™, hereafter referred to as core-loc, has been developed at WES and patented worldwide (Melby and Turk 1995).

Core-loc Geometry

The core-loc (Figure 1) consists primarily of three tapered octagonal members. The two outer members are parallel along their longitudinal axes, while a third central member has a longitudinal axis normal to the outer members. All geometric dimensions can be normalized by the primary or characteristic length. In the case of the core-loc, this is referred to as the “C” dimension, which is the overall length of each of the three tapered octagonal members. Figure 2 shows the nondimensional relationship between C and other basic dimensions where the volume of an individual core-loc V_{CL} can be expressed in terms of C as

$$V_{CL} = 0.2236 C^3 \quad (1)$$

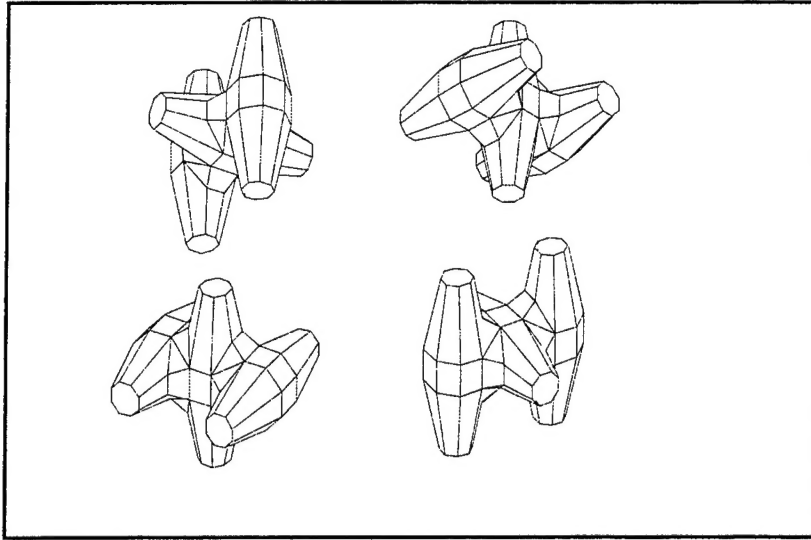


Figure 1. Four views of core-loc

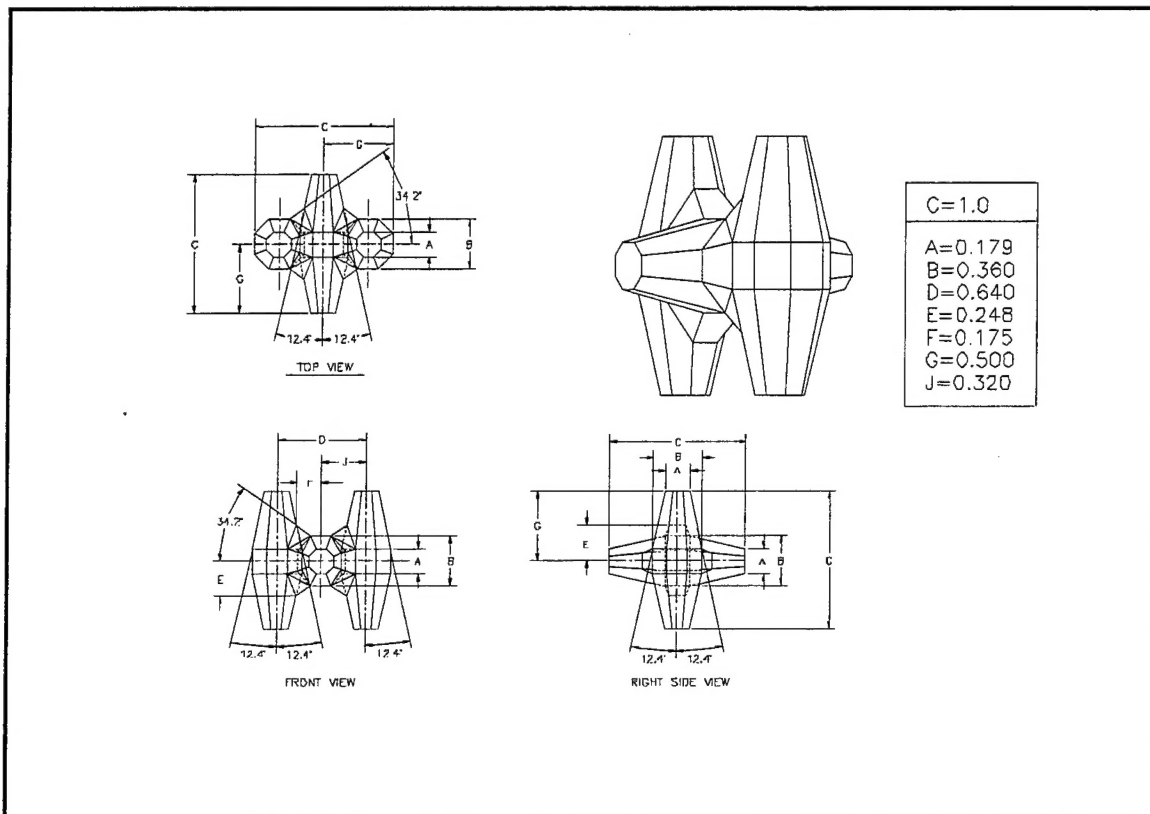


Figure 2. Nondimensional schematic of typical core-loc

Another important geometric parameter that can be based on the C dimension is the surface area of a unit. This is primarily used to determine the amount of steel plate required to fabricate forms. The surface area of a core-loc S_{CL} is given by

$$S_{CL} = 2.70 C^2 \quad (2)$$

Figure 3 shows the dimensions, expressed in terms of C , of the seven individual shapes of plate elements (labeled a thru g) required to construct a core-loc form. The surface area of the core-loc can also be expressed in terms of the individual plate elements as

$$S_{CL} = 6(a) + 12(b) + 24(c) + 8(d) + 8(e) + 16(f) + 16(g) \quad (3)$$

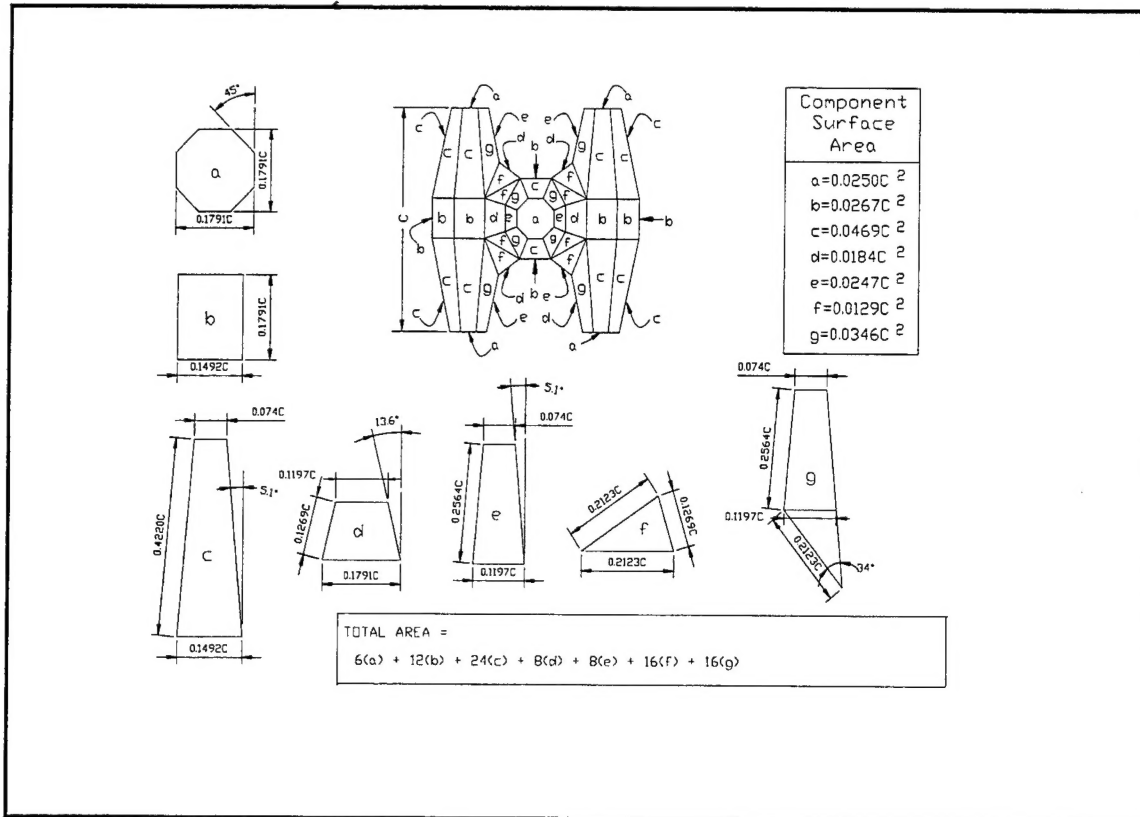


Figure 3. Nondimensional schematic of core-loc surface area

Stable Weight Estimation

The U.S. Army Corps of Engineers *Shore Protection Manual* (SPM 1984) recommends preliminary design estimations of concrete armor unit stable weight using the Hudson Formula

$$W_a = \frac{\gamma_a H^3}{K_D (S_a - 1)^3 \cot \theta} \quad (4)$$

where

K_D = Hudson stability coefficient

H = design wave height (i.e. $H_{1/3}$)

θ = angle of the structure slope measured from horizontal

W_a = weight of an individual armor unit

γ_a = specific weight of armor unit

S_a = specific gravity of armor unit relative to water (γ_a/γ_w)

γ_w = specific weight of water

For preliminary design of core-loc armor units under breaking wave conditions and a no-damage criteria (less than 2 percent displacement by count), the recommended Hudson stability coefficients are $K_D = 16$ for trunk sections and $K_D = 13$ for head sections. These coefficients are valid for structure slopes from 1V:1.33H to 1V:2H. Assuming proper placement technique and sufficient buttressing at all transitions, these stability coefficients should provide a conservative estimate for core-loc design. However, final designs should be validated with three-dimensional physical models replicating local bathymetry and actual design wave conditions and directions where possible.

Armor Layer Thickness

The cost of an armor layer depends primarily on the volume of concrete used to protect the slope. Unit construction costs include material, transportation, and placement costs. Yard costs include construction of form works; concrete placement, storage, and handling; and the cost of equipment necessary to handle the units. But concrete volume dominates the armor layer cost and therefore should be minimized by maximizing the porosity and minimizing the armor

layer thickness. The porosity P for a core-loc armor layer is approximately 60 percent. While most randomly placed concrete armor units are placed in two layers, core-loc are placed in a single layer thickness. The thickness of a core-loc armor layer r_{C-L} expressed as a function of the characteristic length C is

$$r_{C-L} \approx 0.92 C \quad (5)$$

The layer thickness can also be expressed by Equation 7-121 of the SPM (1984) as

$$r = n k_{\Delta} (W_a / \gamma_a)^{1/3} \quad (6)$$

where

n = number of layers

k_{Δ} = layer coefficient ($k_{\Delta} = 1.51$ for core-loc)

Armor Layer Packing Density

In order to provide adequate coverage on a breakwater slope with concrete armor and maintain integral unit-to-unit interlocking, a proper packing density should be achieved. Packing density is defined as the number of individual armor units required to cover a given area of slope as given by

$$\frac{N_a}{A} = n k_{\Delta} (1 - P/100) (\gamma_a / W_a)^{2/3} \quad (7)$$

or

$$\frac{N_a}{A} = \phi V^{-2/3} \quad (8)$$

where

N_a = number of armor units

A = unit area of breakwater slope to be armored

ϕ = packing density coefficient

V = volume of an individual concrete armor unit

P = armor layer porosity

For core-loc two-dimensional model studies, a wide range of physical model experimental wave and water level conditions, as well as several cross-sectional geometries, have shown stable structures built with packing density coefficients as low as $\phi = 0.54$ and as high as $\phi = 0.64$. Based on the results of these tests, a packing density coefficient of $\phi = 0.60$ is recommended. However, certain model-to-prototype scale effects exist and, for the newly developed core-loc, there are few data on prototype packing densities.

Sogreah Ingénierie has built over 85 structures using the ACCROPODE[®], hereafter referred to as accropode, a concrete armor unit which is also placed in a single layer. Sogreah recommends a lower packing density for larger armor units (Sogreah 1996). This may be due in part to the difficulty of handling larger units, which limits the ability to pack them tightly. For example, for accropode model units, and prototype armor under 5 m³, Sogreah recommends $\phi = 0.656$, for units with volumes of 6.3-12 m³, Sogreah recommends $\phi = 0.615$, a decrease of 6.25 percent, and for volumes of 14-22 m³, $\phi = 0.577$, a decrease of 12 percent from the model scale packing density.

Using Sogreah's recommendations for accropode, a rationale for comparison of prototype core-loc packing density coefficients to be used for economic evaluation can be developed. Table 1 lists accropode packing density coefficients recommended by Sogreah and possible core-loc packing density coefficients based on the accropode experience. Actual values may vary. In the interim, these core-loc packing density values are given for economic evaluation and preliminary design, and may prove to be higher in the prototype and therefore not recommended for final design until validated with considerable field experience. In all cases, the core-loc units should be packed as tightly as possible.

Table 1
Possible Core-Loc Prototype Packing Density Coefficients Based on Prototype Accropode Experience

Volume (m ³)	≤5 m ³	6.3-12 m ³	14-22 m ³
ACCROPODE [®] ϕ	0.656	0.615	0.577
CORE-LOC [™] ϕ	0.60	0.56	0.54

2 Core-Loc as a Repair Unit for Dolos Armoring

Maintenance and repair of concrete-armored slopes poses an entirely different set of challenges from new armor layer construction. With broken dolos armor units found on many Corps concrete-armored structures and on structures worldwide, a need exists for high-integrity rehabilitation. In the past, dolos layers have been repaired using similar dolosse, with less than favorable results. Scale model testing has shown, with its unique geometric shape, core-loc has an affinity for interlocking with and stabilizing dolosse.

When core-loc units are intermeshed with dolosse, the separation and taper of the outer flukes provide superior interlocking with dolosse when sized properly. Proper sizing is achieved when the characteristic length of a core-loc C_{CL} is approximately 0.92 the characteristic length of a dolos C_{DO} . When $C_{CL} = 0.92 C_{DO}$, the volume of an individual core-loc V_{CL} will be 1.11 times the volume of an individual dolos V_{DO} . However, because of the significantly lower packing density for core-loc compared to dolos, the total volume of concrete used for the core-loc repair of dolos layers is less than the volume of concrete used on the original dolos armoring. The core-loc repair is more economical even though the individual core-loc weighs more than the individual dolos.

3 Structural Considerations

Concrete used in the fabrication of armor units must be durable, abrasion-resistant, and strong enough to resist loads associated with the harsh ocean environment. It is generally recognized that the primary loads concrete armor units are subjected to are quasi-static, wave loads, and unit-to-unit impact. It is anticipated that, except in special circumstances (i.e. extremely large units), core-loc will be manufactured from unreinforced concrete. Thus the tensile strength of the concrete must have the capacity to withstand the aforementioned harsh loading conditions. Most of the concrete armor unit structural research by the Corps of Engineers has focused on dolosse. Comparative finite element analysis between dolosse and core-loc has revealed that maximum tensile stresses in core-loc generated by static loading are approximately half those of equivalent size dolosse. Due to the similar tapered octagonal sections shared by core-loc and dolosse, wave loads are estimated to be approximately equal. Unlike most types of concrete armor units which are placed in two layers, core-loc is placed in a single layer. During construction of two-layer systems, it is often difficult to prevent some units in the upper layer from rocking. These units often break due to unit-to-unit impact loads. Properly designed core-loc armor layers exhibit very little movement. Thus in most cases, there is little need for structural capacity to resist unit-to-unit impacts. While detailed structural requirements should be addressed on a case-by-case basis, as a general rule-of-thumb for most conditions and structures, core-loc units should meet the present Corps of Engineers minimum concrete strength standard. In the United States, concrete used for all but the largest concrete armor units should obtain a 28-day compressive strength of 35 Mpa (5,000 psi) or 3.5 Mpa (500 psi) tensile strength in order to possess reserve structural capacity.

4 Fabrication, Handling and Placement

Mixing, casting, and curing are all integral to the concrete armor fabrication process. A concrete mixture must be proportioned to produce concrete that is capable of withstanding harsh marine environments. Ideally, concrete should be impervious to seawater attack, be abrasion-resistant, and possess adequate strength. Quality assurance requires that concrete have a consistent homogeneity, free of defects and flaws. Concrete quality is a function of proportions and type of cement, aggregate, water, and admixtures. The following information on a recommended concrete mixture serves only as a starting point for mixture proportioning studies. Many factors affect the integrity of the final product. Variability in the chemical and physical interaction of the individual constituents requires rigorous testing of the final mixture proportions. Therefore, it is imperative that the mix design be "fine-tuned" and tested in a certified concrete testing laboratory. It is recommended that axial compression and splitting tensile tests be used for evaluating mixture proportions, and for quality control of the final product.

Concrete Quality

Guidance for specification of concrete materials for civil works structures is provided in Engineer Manual 1110-2-2000 (U.S. Army Corps of Engineers 1994). Guidelines for concrete used in casting and handling of core-loc units are as follows:

- A. Concrete used for core-loc should possess the following qualities:
 - (1) 28-day compressive strength: 35 Mpa (5,000 psi) (minimum).
 - (2) 28-day splitting tensile strength: 3.5 Mpa (500 psi) (minimum).
 - (3) Slump: 50 mm (2 in.) to 100 mm (4 in.).

- (4) Air entrainment: $\leq 5\%$.

B. A typical baseline specification for trial mixture proportions is as follows:

- (1) Cement.
 - a. Type II or III.
 - b. Concentration: 218-230 kg/m³ (365-385 lb/cy).
 - c. Water/cement ratio: 0.35-0.55.
- (2) Aggregate.
 - a. Non-alkali-silica reactive.
 - b. Maximum size: 38 mm (1.5 in.) - 76 mm (3 in.)(dependent on armor unit size).
 - c. Gradation conforms to American Society for Testing and Materials (ASTM) C33-84.
 - d. Fineness modulus for fine aggregate: 2.4-3.0.
 - e. Adequate hardness to provide abrasion resistance.
- (3) Water.
 - a. Potable, free from high concentration of sodium or potassium.
- (4) Admixtures.
 - a. Minimum air entrainment.
 - b. Superplasticizers, increase workability and reduce water content.
 - c. If steel reinforcement is used, avoid chloride-based accelerating agents.

American Standards for Concrete, Cement, and Aggregates

The following ASTM standards should be followed in the selection and testing of concrete, cement, and aggregate to be used in the fabrication of core-loc:

- (1) ASTM C33 - Concrete aggregates.
- (2) ASTM C40 - Organic impurities in fine aggregate.
- (3) ASTM C70 - Surface moisture in fine aggregates.
- (4) ASTM C94 - Ready-mixed concrete.
- (5) ASTM C109 - Compressive strength of hydraulic cement mortars (using 50-mm cubes).
- (6) ASTM C114 - Chemical analysis of hydraulic cement.
- (7) ASTM C131 - Resistance to degradation of small-size aggregate by abrasion and impact in Los Angeles machine.
- (8) ASTM C136 - Sieve analysis of fine and coarse aggregate.
- (9) ASTM C143 - Slump of portland cement concrete.
- (10) ASTM C150 - portland cement.
- (11) ASTM C151 - Autoclave expansion of portland cement.
- (12) ASTM C186 - Heat of hydration of hydraulic cement.
- (13) ASTM C191 - Time of setting of hydraulic cement by Vicat needle.
- (14) ASTM C227 - Potential alkali reactivity of cement-aggregate combinations.
- (15) ASTM C231 - Air content of freshly mixed concrete by the pressure method.
- (16) ASTM C260 - Air-entraining admixture for concrete.
- (17) ASTM C348 - Flexural strength of hydraulic cement mortars.
- (18) ASTM C349 - Compressive strength of hydraulic cement mortars.
- (19) ASTM C494 - Chemical admixtures for concrete.
- (20) ASTM C496 - Splitting tensile strength of cylindrical concrete specimens.
- (21) ASTM C535 - Resistance to degradation of large-size aggregate by abrasion and impact in Los Angeles machine.

- (22) ASTM C566 - Total moisture content of aggregate by drying.
- (23) ASTM C596 - Drying shrinkage of mortar containing portland cement.
- (24) ASTM C805 - Rebound number of hardened concrete.
- (25) ASTM D2419 - Sand equivalent value of soils and fine aggregate.

Casting Guidelines

For successful casting of core-loc, the following guidelines are recommended:

- (1) Concrete is usually placed in formworks in lifts no more than 60 cm (24 in.).
- (2) Each lift vibrated to remove voids.
- (3) Armor units with cold joints should always be rejected.
- (4) In general, forms should be stripped no sooner than 24 hr unless sufficient high early strengths are attained.
- (5) Curing agent should be applied as soon as forms are stripped.
- (6) Steam curing should be avoided unless the contractor can prove an acceptable level for the heat of hydration.
- (7) Heat of hydration should never be allowed to exceed 75 °C.
- (8) Quality control test cylinders should be made for each 150-m³ (196-yd³) placed, and cured at the same temperatures found within the concrete armor unit being cast.

Once the units are cast, the following items warrant consideration:

- (1) Units must be handled carefully -- excessive impact stresses can be generated from even moderate drop heights (< 0.5 m (20 in.)).
- (2) If a unit is dropped, it must be carefully inspected -- if cracked it should be rejected.
- (3) Once on site, if a unit is found to be cracked it should not be placed on the armor layer.

- (4) During shipping, units should be secured (shimmed if necessary to avoid rocking) to prevent unit-to-unit impacts during transport.

Handling and Stocking

The easiest way to handle core-loc units in the casting yard is to use a crane with either single or double slings. With minor modifications, forklifts and front-end loaders can be used to move smaller units (usually less than 15 tonnes). Lifting eyes or inserts can also be placed in the top of the outer flukes for a two-point pick or an additional eye can be placed at the tip of the central fluke for a three-point pick.

When storing core-loc units in a casting yard, the most efficient storage pattern is to place the units in a row, tipped over, resting at a 45-deg angle on the central fluke with minimal space between adjacent units (Figure 4). The required area A_y needed for storing a single row of 10 core-loc units can be expressed in terms of the characteristic length C (which is also the width of the rectangular row) as

$$A_y = 5.23 C^2 \quad (9)$$

If storage area is at a premium, rows of core-loc units can be stacked on top of each other in a "herringbone" fashion, which effectively doubles yard capacity (Figure 5). Adjacent rows can be placed side-by-side close together, and stacked or unstacked from the row ends. This eliminates the need for most access roads between rows.

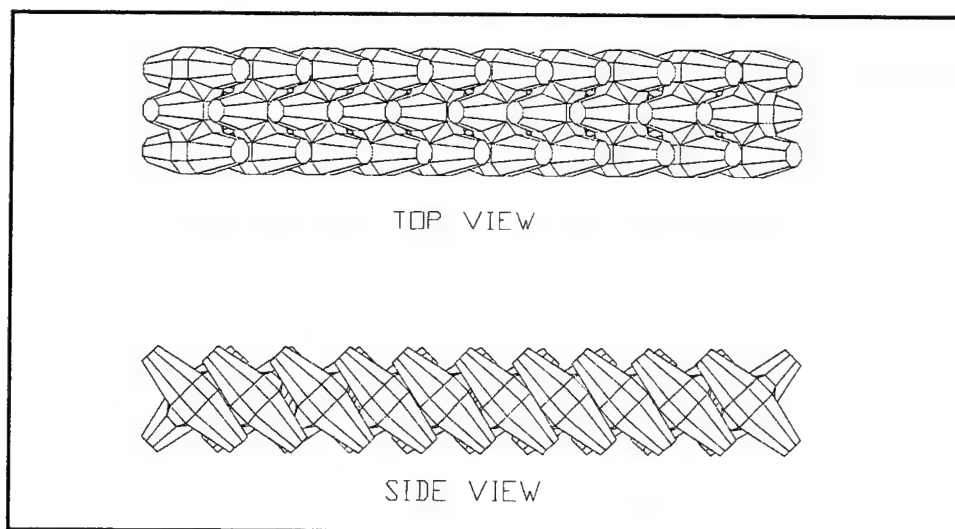


Figure 4. Efficient storage pattern for core-loc in casting yard

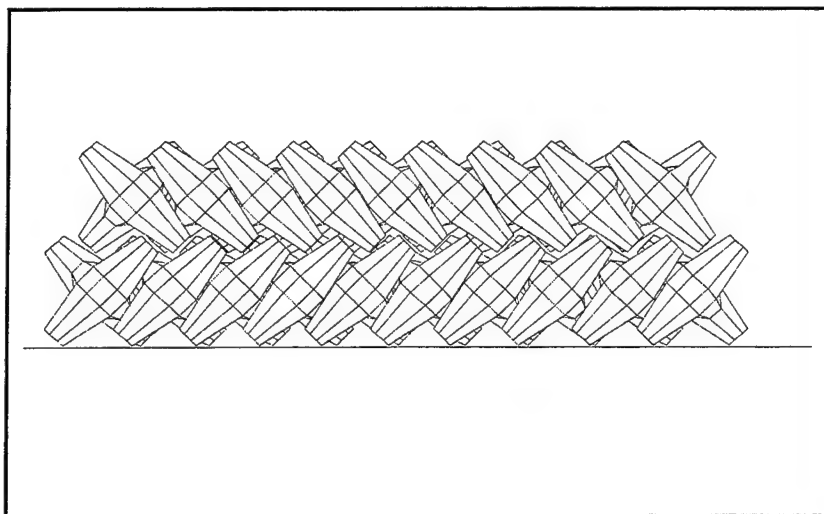


Figure 5. Core-loc stacked two courses in height

Core-loc Placement

Core-loc was designed to be placed in a single layer thickness in a random matrix. However, the most vulnerable portion of an armor layer is at the structure toe. Special consideration may be given to placement of the toe units and the second course of units. Although core-loc units can be placed randomly along the toe, based on experimental results, a pattern placement along the toe is more stable. Figure 6 shows a possible arrangement for placing the toe units. The individual core-loc units are set in a three-point stance in "cannon" fashion with the central fluke pointing seaward, up at a 45-deg angle like the cannon barrel. All toe units are placed side-by-side with minimal space between

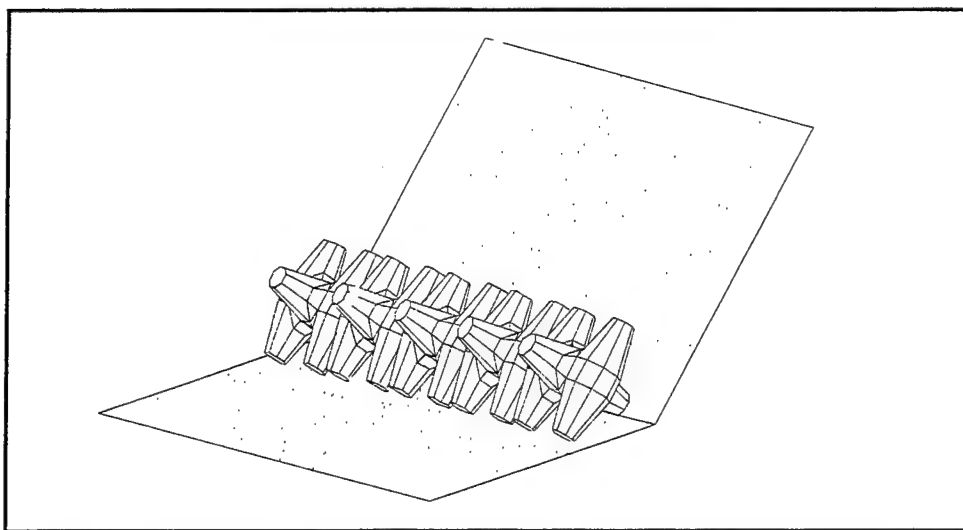


Figure 6. One possible method for placement of toe units: cannon fashion

adjacent units. The second course of units is laid atop of the toe units such that they straddle each toe unit (Figure 7). Once the second row has been placed, all subsequent armor units are placed in a random matrix. While these units are placed in a variety of random orientations, care must be taken to assure that all overlying units are interlocked with and constrain underlying units.

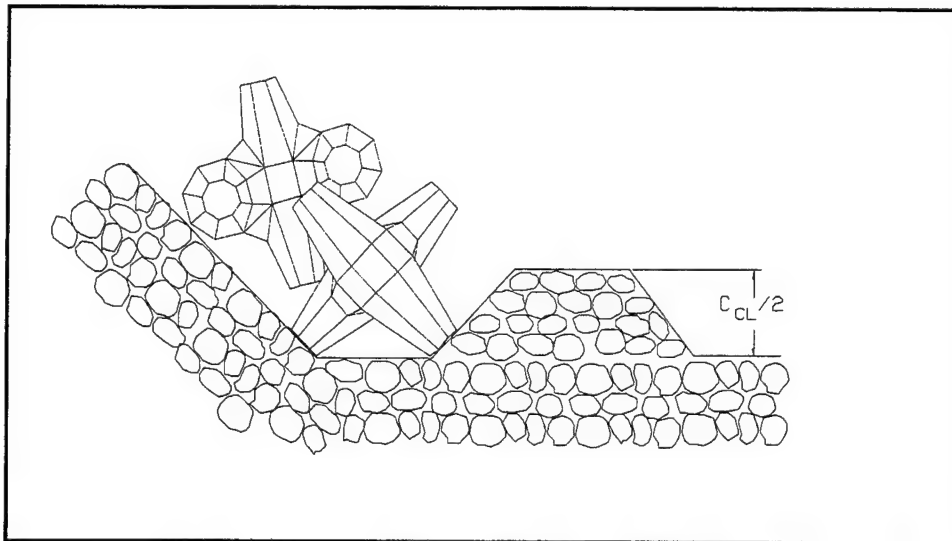


Figure 7. Possible method for toe and second course placement

The specified packing density must be strictly maintained during construction to assure proper interlocking, and therefore hydraulic stability, of the armor layer. During placement, packing density can be maintained by specifying a mean and allowable deviation for the centroidal distance (in three dimensions) between units. Although the orientation of the core-loc units is random, in general, each subsequent row of armor units is offset laterally from the previous lower row. To specify the placement grid, D_H is the distance between the centroids of two adjacent units on the same horizontal row and D_U is the distance between the centroids of units upslope in the plane of the structure slope (Figure 8). For core-loc sizes and packing density coefficients listed in Table 1, values of D_H and D_U are given in Table 2 in terms of characteristic length C .

In a random matrix of core-loc units, every effort should be made to achieve maximum interlocking. The maximum centroidal distance D_{max} should not exceed 110 percent of the values specified in Table 2. Greater spacing may jeopardize interlocking and the integrity of the armor layer.

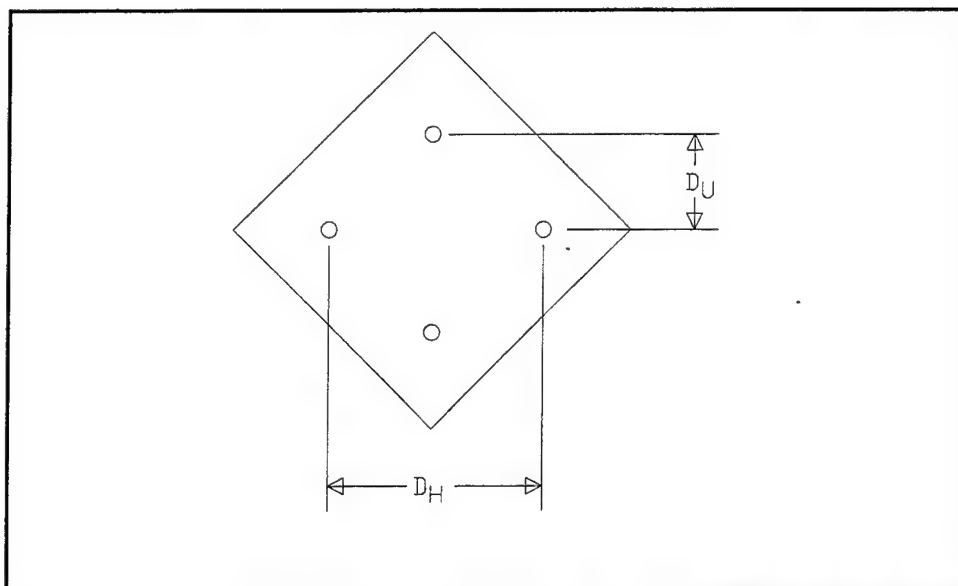


Figure 8. Schematic of core-loc placement grid

Table 2 Specifications for Placement Grid Coordinates			
Volume (m ³)	≤ 5 m ³	6.3-12 m ³	14-22 m ³
P. D. Coefficient, ϕ	0.60	0.56	0.54
D_H	1.11C	1.15C	1.18C
D_U	0.55C	0.57C	0.59C

During quality control inspections, the packing density should be checked by measuring out a control area (an area of 100-200 m² is typical) of the randomly placed armor units on the slope and counting the number of units within this area. This gives an estimate of the packing density N/A . Several overlapping control areas should be laid out and multiple counts made. Sometimes it is difficult to determine whether an individual core-loc is within the perimeter boundary of a control area. When counting units along the perimeter, if 50 percent or more of an individual core-loc is within the boundary, it should be included in the count.

5 Recommended Standard Core-loc Sizes

To provide efficient utilization of formwork, a need exists to standardize core-loc sizes. By doing this, an inventory of standard form sizes can be made available for projects around the world, thus reducing the need of building custom forms for each individual project. With standard sizing, forms can be reused. A single form, properly constructed and maintained, can be expected to last 10-15 years. The initial fabricators of core-loc forms benefit from the ability to sell or lease used forms. Future project owners benefit by purchasing or leasing used forms instead of fabricating new ones.

Tables 3 through 8 suggest standardized core-loc sizes with their associated geometric relationships, hydraulic stability capacity, and structural requirements. Standard sizes of core-loc range from 0.7-31.0 m³. Table 3 shows the geometric relationship between the characteristic length C and the other basic dimensions of the standard core-loc sizes expressed in meters. A reference schematic accompanies the table. Table 4 provides surface area relationships for the standard sizes of core-loc units. This table is helpful in estimating the amount of steel sheeting required to construct formworks. Tables 5-7 show the hydraulically stable weight for core-loc units for a range of specific gravity between 2.18-2.66 for structure slopes of 1V:1.33H, 1V:1.5H, and 1V:2H, respectively. Table 8 provides information on packing density, layer thickness, and storage area requirement for the standard sizes of core-loc.

Table 3 Geometric Relationships of Standard Core-loc Sizes								
Volume (m ³)	Basic Dimensions of Standard Core-loc Sizes (in meters) (from Figure 2)							
	C	A	B	D	E	F	G	J
0.7	1.46	0.26	0.53	0.94	0.36	0.26	0.73	0.47
1.4	1.85	0.33	0.67	1.19	0.46	0.32	0.93	0.59
2.4	2.20	0.39	0.79	1.41	0.55	0.38	1.10	0.70
3.9	2.59	0.46	0.93	1.66	0.64	0.45	1.29	0.83
6.2	3.02	0.54	1.09	1.93	0.75	0.53	1.51	0.97
8.5	3.36	0.60	1.21	2.15	0.83	0.59	1.68	1.08
11.0	3.67	0.66	1.32	2.35	0.91	0.64	1.83	1.17
15.4	4.10	0.73	1.47	2.62	1.02	0.72	2.05	1.31
20.8	4.53	0.81	1.63	2.90	1.12	0.79	2.26	1.45
31.0	5.17	0.93	1.86	3.31	1.28	0.91	2.59	1.66

Table 4 Surface Area Relationships of Standard Core-loc Sizes									
Vol- ume (V in m ³)	Basic Area Dimensions of Standard Core-loc Sizes (m ²)								Total Area
	C	a	b	c	d	e	f	g	S_CL
0.7	1.46	0.05	0.06	0.10	0.04	0.05	0.03	0.07	5.78
1.4	1.85	0.09	0.09	0.16	0.06	0.08	0.04	0.12	9.29
2.4	2.20	0.12	0.13	0.23	0.09	0.12	0.06	0.17	13.06
3.9	2.59	0.17	0.18	0.31	0.12	0.17	0.09	0.23	18.08
6.2	3.02	0.23	0.24	0.43	0.17	0.23	0.12	0.32	24.61
8.5	3.36	0.28	0.30	0.53	0.21	0.28	0.15	0.39	30.55
11.0	3.66	0.34	0.36	0.63	0.25	0.33	0.17	0.46	36.25
15.4	4.10	0.42	0.45	0.79	0.31	0.41	0.22	0.58	45.32
20.8	4.53	0.51	0.55	0.96	0.38	0.51	0.26	0.71	55.36
31.0	5.17	0.67	0.71	1.26	0.49	0.66	0.35	0.93	72.31

Table 5
Hydraulically Stable Weight for Core-loc on 1V:1.33H Slope

Vol- ume (V in m ³)	Typical Range of Specific Gravity (S _r)			Range of Hydraulically Stable Weight (W in tonnes)			Effective Wave Height Protection Trunk with K _D = 16 (H _s in m)		
	min	mean	max	min	mean	max	min	mean	max
0.7	2.18	2.42	2.66	1.5	1.7	1.9	2.7	3.3	3.9
1.4	2.18	2.42	2.66	3.1	3.4	3.8	3.5	4.2	4.9
2.4	2.18	2.42	2.66	5.2	5.8	6.3	4.1	5.0	5.8
3.9	2.18	2.42	2.66	8.4	9.4	10.3	4.8	5.9	6.9
6.2	2.18	2.42	2.66	13.4	14.9	16.4	5.6	6.8	8.0
8.5	2.18	2.42	2.66	18.5	20.6	22.7	6.3	7.6	8.9
11.0	2.18	2.42	2.66	24.0	26.6	29.3	6.8	8.3	9.7
15.4	2.18	2.42	2.66	33.5	37.2	40.9	7.7	9.3	10.9
20.8	2.18	2.42	2.66	45.2	50.2	55.3	8.5	10.2	12.0
31.0	2.18	2.42	2.66	67.5	75.0	82.5	9.7	11.7	13.7

Vol- ume (V in m ³)	Typical Range of Specific Gravity (S _r)			Range of Hydraulically Stable Weight (W in tonnes)			Effective Wave Height Protection Head with K _D = 13 (H _s in m)		
	min	mean	max	min	mean	max	min	mean	max
0.7	2.18	2.42	2.66	1.5	1.7	1.9	2.6	3.1	3.6
1.4	2.18	2.42	2.66	3.1	3.4	3.8	3.2	3.9	4.6
2.4	2.18	2.42	2.66	5.2	5.8	6.3	3.8	4.6	5.4
3.9	2.18	2.42	2.66	8.4	9.4	10.3	4.5	5.5	6.4
6.2	2.18	2.42	2.66	13.4	14.9	16.4	5.3	6.4	7.5
8.5	2.18	2.42	2.66	18.5	20.6	22.7	5.9	7.1	8.3
11.0	2.18	2.42	2.66	24.0	26.6	29.3	6.4	7.7	9.1
15.4	2.18	2.42	2.66	33.5	37.2	40.9	7.1	8.6	10.1
20.8	2.18	2.42	2.66	45.2	50.2	55.3	7.9	9.6	11.2
31.0	2.18	2.42	2.66	67.5	75.0	82.5	9.0	10.9	12.8

Table 6									
Hydraulically Stable Weight for Core-loc on 1V:1.5H Slope									
Vol- ume (V in m ³)	Typical Range of Specific Gravity			Range of Hydraulically Stable Weight			Effective Wave Height Protection Trunk with K _D = 16 (H _s in m)		
	(S _r)			(W in tonnes)					
	min	mean	max	min	mean	max	min	mean	max
0.7	2.18	2.42	2.66	1.5	1.7	1.9	2.8	3.4	4.0
1.4	2.18	2.42	2.66	3.1	3.4	3.8	3.6	4.4	5.1
2.4	2.18	2.42	2.66	5.2	5.8	6.3	4.3	5.2	6.1
3.9	2.18	2.42	2.66	8.4	9.4	10.3	5.0	6.1	7.1
6.2	2.18	2.42	2.66	13.4	14.9	16.4	5.9	7.1	8.3
8.5	2.18	2.42	2.66	18.5	20.6	22.7	6.5	7.9	9.3
11.0	2.18	2.42	2.66	24.0	26.6	29.3	7.1	8.6	10.1
15.4	2.18	2.42	2.66	33.5	37.2	40.9	8.0	9.6	11.3
20.8	2.18	2.42	2.66	45.2	50.2	55.3	8.8	10.7	12.5
31.0	2.18	2.42	2.66	67.5	75.0	82.5	10.1	12.2	14.3
Vol- ume (V in m ³)	Typical Range of Specific Gravity			Range of Hydraulically Stable Weight			Effective Wave Height Protection Head with K _D = 13 (H _s in m)		
	(S _r)			(W in tonnes)					
	min	mean	max	min	mean	max	min	mean	max
0.7	2.18	2.42	2.66	1.5	1.7	1.9	2.7	3.2	3.8
1.4	2.18	2.42	2.66	3.1	3.4	3.8	3.4	4.1	4.8
2.4	2.18	2.42	2.66	5.2	5.8	6.3	4.0	4.8	5.7
3.9	2.18	2.42	2.66	8.4	9.4	10.3	4.7	5.7	6.7
6.2	2.18	2.42	2.66	13.4	14.9	16.4	5.5	6.6	7.8
8.5	2.18	2.42	2.66	18.5	20.6	22.7	6.1	7.4	8.7
11.0	2.18	2.42	2.66	24.0	26.6	29.3	6.7	8.0	9.4
15.4	2.18	2.42	2.66	33.5	37.2	40.9	7.4	9.0	10.6
20.8	2.18	2.42	2.66	45.2	50.2	55.3	8.2	9.9	11.7
31.0	2.18	2.42	2.66	67.5	75.0	82.5	9.4	11.4	13.3

Table 7 Hydraulically Stable Weight for Core-loc on 1V:2H Slope									
Vol- ume (V in m ³)	Typical Range of Specific Gravity			Range of Hydraulically Stable Weight			Effective Wave Height Protection for Trunk with K _D = 16 (H _s in m)		
	(S _r)			(W in tonnes)					
	min	mean	max	min	mean	max	min	mean	max
0.7	2.18	2.42	2.66	1.5	1.7	1.9	3.1	3.8	4.4
1.4	2.18	2.42	2.66	3.1	3.4	3.8	4.0	4.8	5.6
2.4	2.18	2.42	2.66	5.2	5.8	6.3	4.7	5.7	6.7
3.9	2.18	2.42	2.66	8.4	9.4	10.3	5.5	6.7	7.9
6.2	2.18	2.42	2.66	13.4	14.9	16.4	6.5	7.8	9.2
8.5	2.18	2.42	2.66	18.5	20.6	22.7	7.2	8.7	10.2
11.0	2.18	2.42	2.66	24.0	26.6	29.3	7.8	9.5	11.1
15.4	2.18	2.42	2.66	33.5	37.2	40.9	8.8	10.6	12.4
20.8	2.18	2.42	2.66	45.2	50.2	55.3	9.7	11.7	13.8
31.0	2.18	2.42	2.66	67.5	75.0	82.5	11.1	13.4	15.7
Vol- ume (V in m ³)	Typical Range of Spec- ific Gravity			Range of Hydraulically Stable Weight			Effective Wave Height Protection for Head with K _D = 13 (H _s in m)		
	(S _r)			(W in tonnes)					
	min	mean	max	min	mean	max	min	mean	max
0.7	2.18	2.42	2.66	1.5	1.7	1.9	2.9	3.5	4.2
1.4	2.18	2.42	2.66	3.1	3.4	3.8	3.7	4.5	5.3
2.4	2.18	2.42	2.66	5.2	5.8	6.3	4.4	5.3	6.2
3.9	2.18	2.42	2.66	8.4	9.4	10.3	5.2	6.3	7.3
6.2	2.18	2.42	2.66	13.4	14.9	16.4	6.0	7.3	8.6
8.5	2.18	2.42	2.66	18.5	20.6	22.7	6.7	8.1	9.5
11.0	2.18	2.42	2.66	24.0	26.6	29.3	7.3	8.9	10.4
15.4	2.18	2.42	2.66	33.5	37.2	40.9	8.2	9.9	11.6
20.8	2.18	2.42	2.66	45.2	50.2	55.3	9.0	10.9	12.8
31.0	2.18	2.42	2.66	67.5	75.0	82.5	10.3	12.5	14.7

Table 8 Volume and Area Requirements of Standard Core-loc Sizes					
Standard Volume	Volume of Concrete per m ² of slope facing (m ³ /m ²)			Layer Thickness	Area required to store row of 10 C-L
(m ³)	$\phi = 0.54$	$\phi = 0.56$	$\phi = 0.60$	(m)	(m ²)
0.7			0.53	1.3	7.6
1.4			0.68	1.7	9.7
2.4			0.80	2.0	11.5
3.9			0.94	2.4	13.5
6.2		1.03		2.8	15.8
8.5		1.14		3.1	17.6
11.0		1.24		3.4	19.1
15.4	1.34			3.8	21.4
20.8	1.48			4.2	23.6
31.0	1.69			4.8	27.0

References

Melby, J.A., and Turk, G.F. (1995). "CORE-LOC: Optimized concrete armor units," PIANC Bul. N. 87-5, 5-21.

Sogreah Ingénierie (1996). "ACCROPODE," Informational brochure, Sogreah, Inc., Grenoble, France.

Shore Protection Manual. (1984). 4th ed., 2 Vol, U.S. Army Engineer Waterways Experiment Station, U.S. Government Printing Office, Washington, DC.

U.S. Army Corps of Engineers. (1994). "Standard practice for concrete for civil works structures," Engineer Manual 1110-2-2000, Washington, DC.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE June 1997	3. REPORT TYPE AND DATES COVERED Final report	
4. TITLE AND SUBTITLE CORE-LOC™ Concrete Armor Units: Technical Guidelines			5. FUNDING NUMBERS Work Units 32536 and 32662	
6. AUTHOR(S) George F. Turk, Jeffrey A. Melby				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Engineer Waterways Experiment Station 3909 Halls Ferry Road Vicksburg, MS 39180-6199			8. PERFORMING ORGANIZATION REPORT NUMBER Miscellaneous Paper CHL-97-6	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Corps of Engineers Washington, DC 20314			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES Available from National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) This report provides technical guidelines for a new type of concrete armor unit called CORE-LOC™ (hereafter referred to as core-loc), which was developed and patented worldwide by the U.S. Army Engineer Waterways Experiment Station. Information is provided on core-loc geometry, stable weight estimation, armor layer thickness, and armor layer packing density. The use of core-loc as a repair unit for dolos armoring is discussed. Fabrication guidelines are provided, including a discussion of American standards for concrete, cement, and aggregates. Recommended standard core-loc sizes are discussed and tables are provided that suggest standardized core-loc sizes with their associated geometric relationships, hydraulic stability capacity, and structural requirements.				
14. SUBJECT TERMS Concrete armor units CORE-LOC Dolos Dolos-armored breakwaters			15. NUMBER OF PAGES 28	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT	20. LIMITATION OF ABSTRACT	